


NYLATRON® NSM PA6

**SIMPLY NO
SUBSTITUTE**

LEADING THE INDUSTRY IN SUPERIOR WEAR RESISTANCE

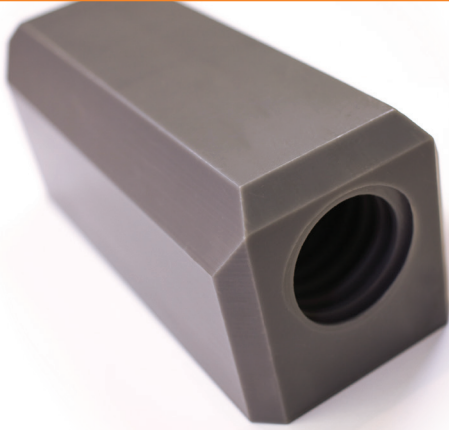

Nylatron® NSM PA6 outperforms all other “premium” wear grade materials, and was developed specifically for demanding applications (ideal for bearings and wear pads). At an affordable price, Nylatron® NSM PA6 offers advantages like superior wear resistance, weight and noise reduction, corrosion resistance, and easy machining. Save time and money with increased performance and productivity of this self-lubricating Nylatron® PA6 product – less downtime and reduced maintenance.


Key Benefits

- Self lubricating Nylatron® PA6 for superior wear resistance
- Highest wear resistant Nylon available
- k-factor = 12
- PV = 5 X standard cast Nylons
- Longer part life
- Cost vs. performance ratio value
- Continues to outperform other premium materials

Availability

- Stock Shapes:**
- Rod
 - Sheet/Plate
 - Tube
 - Near Net Shapes

- Profiles:**
- Machined to drawing components
 - Finished according to prints

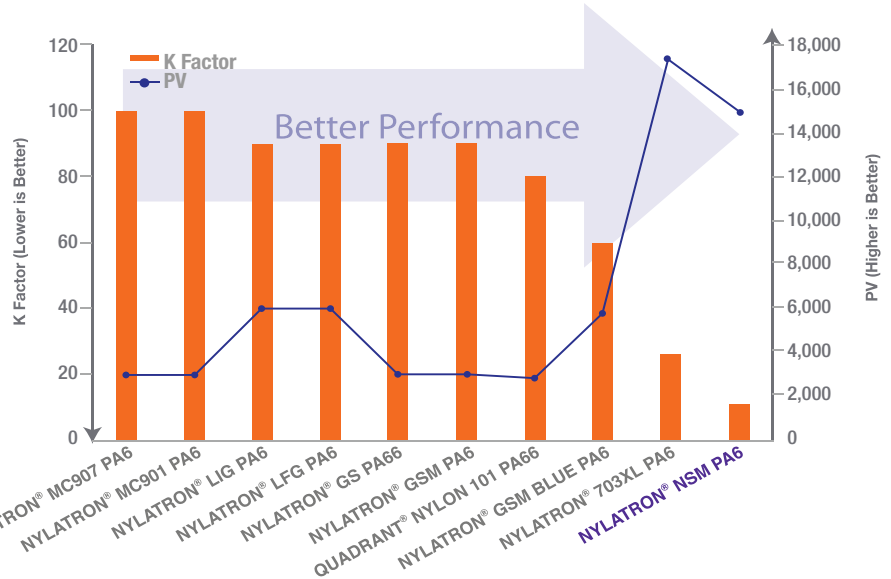

QUADRANT

Aceltron®
GP

Duratron®
PAI, PEI, PI, PBI

Ertalyte®
PET-P

Fluorosint®
PTFE

Ketron®
PEEK

Nylatron®
PA6, PA66


Sanalite®
HDPE/PP

Semitron®
ESd

Techtron®
PPS

TIVAR®
UHMW-PE


NYLATRON® NSM PA6

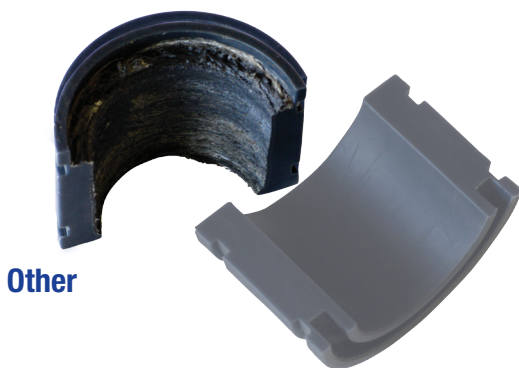

Other

NSM PA6 Bearing

RELATIVE WEAR LIFE

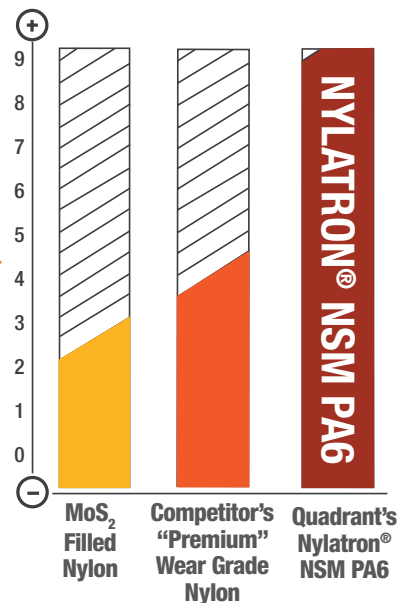

Data Sheet - NYLATRON® NSM PA6

	Property	Units	Test Method	Typical Average Value
Mechanical Properties	Specific Gravity @ 73°F	-	ASTM D792	1.15
	Tensile Strength @ 73°F	psi	ASTM D638	11,000
	Tensile Modulus of Elasticity @ 73°F	psi	ASTM D638	6,000
	Tensile Elongation (at break) @ 73°F	%	ASTM D638	20
	Flexural Strength @ 73°F	psi	ASTM D790	16,000
	Flexural Modulus of Elasticity @ 73°F	ksi	ASTM D790	475,000
	Shear Strength @ 73°F	psi	ASTM D732	10,000
	Compressive Strength @ 10% Deformation @ 73°F	psi	ASTM D695	14,000
	Compressive Modulus of Elasticity @ 73°F	ksi	ASTM D695	400
	Hardness, Rockwell, Scale as Noted @ 73°F	-	ASTM D785	110
	Hardness, Durometer, Shore "D" Scale @ 73°F	-	ASTM D2240	D85
	Notched Izod Impact @ 73°F	ft. lb./in. ²	ASTM D256 Type A	.05
	Coefficient of Friction - (Dry vs. Steel) Dynamic	-	QTM 55007	0.18
	Limiting PV with 4:1 safety factor applied	psi-ft/min	QTM 55007	15,000
Wear Factor K x 10 ⁻¹⁰	in ³ -min/(ft.lb.hr)	QTM 55010	12.0 x10 ⁻¹⁰	
Thermal Properties	Coefficient of Liner Thermal Expansion (-40°F to 300°F)	in./in./°F	ASTM E831 (TMA)	5.5 x 10 ⁻⁵
	Heat Deflection Temperature @ 264 psi	°F	ASTM D648	200
	Tg-Glass Transition (amorphous)	°F	ASTM D3418	NA
	Melting Point (crystalline) peak	°F	ASTM D3418	420
	Continuous Service Temp in Air (Max.) ⁽¹⁾	°F	-	200
	Thermal Conductivity	BTU in./(hr. ft. ² °F)	F433	-
Electrical Properties	Dielectric Strength (Short Term)	Volts/mil	ASTM D149	400
	Surface Resistivity	ohms/square	EOS/ESD S11.11	>10 ¹³
	Dielectric Constant, 10 ⁶ Hz	-	ASTM D150	3.7
	Dissipation Factor, 10 ⁶ Hz	-	ASTM D150	-
	Flammability @ 3.1mm (1/8 in.) ⁽³⁾	-	UL94	HB
Other	Water Absorption Immersion, 24 Hours	% by wt.	ASTM D570 ⁽²⁾	0.3
	Absorption Immersion, Saturation	% by wt.	ASTM D570 ⁽²⁾	7

(1) Data represents Quadrant's estimated maximum long-term service temperature based on practical field experience.
 (2) Specimens: 1/8" thick x 2" diameter or square.
 (3) Estimated rating based on available data. The UL-94 Test is a laboratory test and does not relate to actual fire hazard.

All statements, technical information and recommendations contained in this publication are presented in good faith, based upon tests believed to be reliable and practical field experience. The reader is cautioned, however, that Quadrant Engineering Plastic Products does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of Quadrant's products in any given application. Acetron, CleanStat, Corzan, Duraspin, Duratron, Ert, Ertacetal, Ertalene, Ertalon, Ertalyte, Extreme Materials, Fluorosint, Ketron, MC, Monocast, Novatron, Nylatrack, Nylatron, Polypenco, Proteus, Sanalite, Semitron, Techtron, TIVAR, Ultrawear and Vibratuf are registered trademarks of the Quadrant group of companies.

* Classix is a registered trademark of Invivo Ltd. Corp. * Rulon is a registered trademark of Saint Gobain Performance Plastics
 * Torlon and Udel are registered trademarks of Solvay Advanced Polymers * Vespel, Delrin and Teflon are registered trademarks of E.I. DuPont
 * Noryl and Lexan are registered trademarks of GE Plastics * Celazole is a registered trademark of PBI Performance Products, Inc.
 * Kynar is a registered trademark of Arkema * Corzan is a registered trademark of Noveon

Design and content created by Quadrant Engineering Plastic Products and are protected by copyright law. Copyright © 2016 The Quadrant group of companies. All rights reserved.
 00923 | 2.8.16 | 100



Distributed by:

